





Product Introduction:

- Competitively priced.
- Designed with your safety in mind.
- Powerful enough to handle the toughest jobs.
- Backed by an exceptional warranty.
- Finite element design.
- Extremely versatile and slim design.
- Accurate to $\pm 3\%$.
- Smallest ratchet width available on the market to fit the tightest spaces.
- Extremely versatile and light-weight.

产品简介:

- 认证扭力精度 $\pm 3\%$ 。
- 壳体采用航空级AQ7075-T6轻合金材料精制而成，零偏载设计，全面加强了结构强度、韧性并保证了无与伦比的耐久性。
- 专利活塞减震系统，硬涂层活塞套，消除了冲击或震动的伤害，延长使用寿命，节省维修成本。
- 紧密超薄的壁厚，保证扳手在极其狭窄空间的使用。
- 卡接式、互换插件，一机多用。
- 表面阳极处理，耐腐蚀性和耐久性更强。
- 元件制造符合ISO 9001:2008EN和JISQ/AS9000:2004标准。

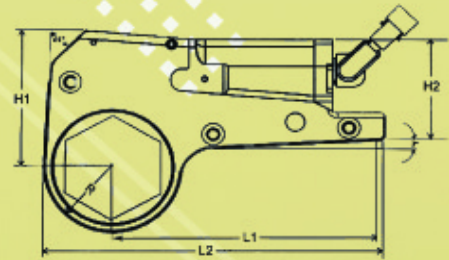

技术参数

型号	HW2	HW4	HW8	HW16	HW32	HW50
最小扭矩(N.m)	270	560	1120	2240	4900	6440
最大扭矩(N.m)	2700	5600	11200	22400	49000	64400
工作头尺寸(mm)	19-60	22-80	32-115	41-127	55-165	80-165
L1(mm)	177.8	213.7	287.3	355.6	406.5	406.5
L2(mm)	226.1	271.8	362.6	455.9	488.9	488.9
H1(mm)	98.2	121.8	156.7	184.2	266.7	266.7
H2(mm)	87.6	96.1	153.7	216.0	279.8	289.6
W1(mm)	31.8	41.3	53.3	59.7	64.8	65.0
W2(mm)	31.8	44.5	53.3	62.2	71.1	79.0
R(mm)	26.2-45.5	33.3-58.5	43.8-75.0	49.5-89.0	63.5-120.7	70.0-120.7
动力头重量(Kg)	1.6	2.6	4.6	7.0	8.2	8.8
工作头重量(Kg)	1.0-1.6	2.4-3.4	5.2-6.4	8.9-12.5	14.5-44.9	16.0-45.0